

Easy to Apply!

HEI-WAY®

Premium Asphalt Materials



1

Remove all loose debris out of the pothole. (Patch area does not need to be dry.)



2

Add material to pothole. Apply in two inch layers and compact each layer until pothole is full.



3

Compact thoroughly using a hand tamp or drive slowly over the patch with a vehicle. *Leave a slight "crown" to allow additional compaction by traffic.*



4

For best results spread a light layer of sand evenly over patched area.

The repair is now ready for traffic!

Coverage Table:

Use to determine number of 50lb bags required to cover desired area.

Area (ft ² / m ²):	2.0 / 0.2	3 / 0.3	5.0 / 0.5	6 / 0.6
Depth (in / cm):	Number of bags required for coverage.			
2 / 5.0	1	1	2	3
3 / 7.5	1	2	3	4
4 / 10.2	2	2	4	5

High Performance Material

Available at:

For More Information:


Phone: 855-443-4929

Web: hei-way.com

Email: info@hei-way.com

HEI-WAY®

LEARN MORE



Professional Grade Asphalt Patching Material

*Easy to Apply
For Permanent Repairs*


Use What Professionals Use!

At **HEI-WAY®** we take pride in our entire business process. Since 1956 product innovation, consistency and quality have been at the forefront of our commitment to excellence. This long term commitment to our customers shows in our entire manufacturing process, personalized service and reliable logistics.

HEI-WAY® products are High Performance Materials (HPM) manufactured to meet and exceed DOT specifications. Our professional grade environmentally friendly materials surpass quality testing for coating, stripping.




HEI-WAY® Professional Grade Asphalt Patching Material is used by utilities, public works, townships, state DOTs, federal agencies, airports, contractors and homeowners to repair and patch utility pipelines, roadways, driveways, parking lots and recreational areas and is easy to use, environmentally friendly, consistently mixed and tested for quality.

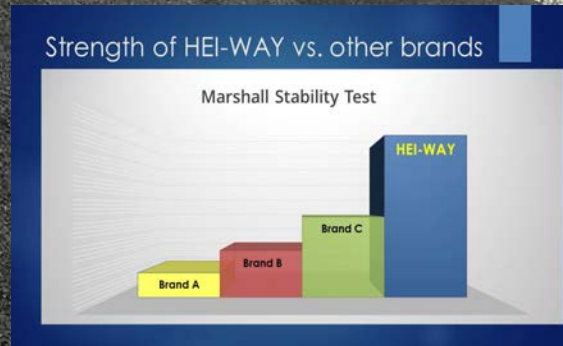

Overall Strength Comparison

Both HEI-WAY Summer and Winter Mix significantly outperformed the other three brands. HEI-WAY Summer Mix proved to have 2 to 6.5 times the strength (or stability) of other brands!

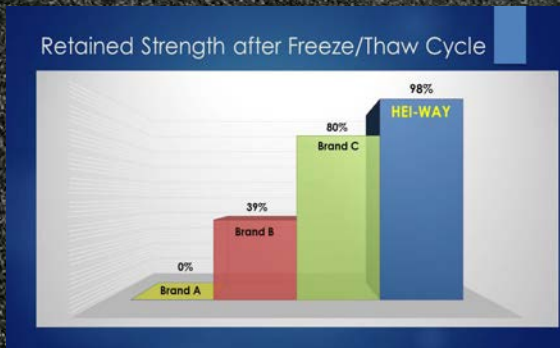

Retained Strength after Freeze/Thaw

An asphalt material that can stand up to freeze thaw cycles while water is present, is a material that will last longer through the difficult winter months. HEI-WAY outperformed all other brands tested, and retained nearly 100% of its superior level of strength.

Benefits and Features:

- ✓ **Consistently outperforms our competitors in strength, durability, performance and laboratory tests**
- ✓ **Permanent all-weather repair**
- ✓ **High workability in extreme temperatures**
- ✓ **Retains strength after freezing and thawing**
- ✓ **Professional grade, high performance**
- ✓ **No mixing needed, ready to use right out of the bag**
- ✓ **Environmentally friendly**
- ✓ **Open to traffic immediately**
- ✓ **Shelf life of at least three years, save and store unused material**
- ✓ **Manufactured in the USA**

HEI-WAY® Mix Grades	Application Temperature
Summer	50° F and above (10° C)
Winter	50° F and below (10° C)